




Northern Meditec Limited
CRIUS V6 ICU Ventilator
Ventilator
V6



ICU Ventilator
Crius V6

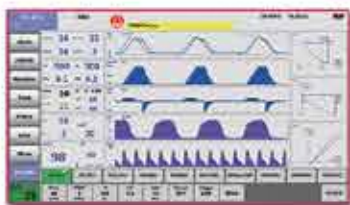

Electrical Interface

Nurse call, USB, NET, RS232, VGA

Interface Type

Main patient outlet : ISO 22M/15F

Oxygen inlet : DISS or NIST male

Display

Display size: 15.6 in diagonal

Display type: Active matrix color TFT LCD

Display resolution: SVGA resolution, 1366 x 768



Controls

Fully electronic control

Ventilation type: Blower

Ventilation modes:

A/C-VCV, A/C-PCV, A/C-PRVC, SIMV-VC, SIMV-PC, SIMV-PRVC, BIPAP, APRV, CPAP, CPAP-VG, NIV, IV.

Special functions:

manual breath, O2 therapy, standby, screen-lock, inspiratory hold, expiratory hold, sigh, ATC, PCVR, PPS, Compliance, p0.1, calibrate, nebulizer, O2 suction.

Patient types: Adult/Pediatric/Neonate

Patient height: Adjustable

THAI MEDICALS TRADING CO.,LTD

Address : 67/17 Moo.1 Mahasawat, Phutthamonthon Nakhonpathom 73170 Thailand

Tel: +66 81-3451047 Web: www.tmt-med.com Web: www.thaimedicaltrading.co.th E-mail : infinity_bio@hotmail.com

Monitoring

Real-time waveforms:

Paw, Flow, Volume, EtCO₂, SPO₂

Optional: CO₂, SPO₂ (related parameters)

Loops: P-V, V-Flow, Flow- P

Trends: 1s, 5s, 1min, 10min, 30min, 60min

Tidal volume: 5 to 2000mL

PEEP/CPAP: 0 to 30 cmH₂O

Oxygen: 21 to 100%

I:E ratio: 1:10 to 4:1

Inspiratory time (TI): 0.2 to 5 s

Flow trigger: 0.2 to 15 l/min

Pressure trigger: -0.5 to -20cmH₂O

Pressure control: 5 to 90 cmH₂O, added to PEEP/CPAP

Pressure support: 0 to 90 cmH₂O, added to PEEP/CPAP

Pressure ramp: 0 to 2s

Expiratory trigger sensitivity (ETS):

OFF, 5 to 90 % of inspiratory peak flow

Peak flow Spontaneous: > 210 L/min

Electrical and gas supplies

Input voltage:

100 to 240V ~ ±10 %, 50 / 60 Hz AC or 24 VDC±10 %

Power consumption: 50 W typical

Protection class: Class I

Backup battery:

2 batteries(5200mAh each)/ hot swappable

Oxygen supply:

280 to 600 kPa (41 to 87 psi), 120 L / min

Low pressure:

oxygen ≤15 L / min, max. 600 hPa for low pressure

Alarms

Operator-adjustable:

Low/high minute volume, low/high pressure, low/high tidal volume, low/high rate, apnea time, low/high oxygen

Optional: low/high CO₂, low/high SPO₂

Special alarms:

Oxygen concentration, disconnection, loss of PEEP, exhalation obstruction, flow sensor, power supply batteries, gas supply

Loudness Adjustable: 1 to 9

Event log: Storage and display of up to 1000 events with date and time stamp

Physical dimensions

Weight: < 45.3 kg

Dimensions(WxHxD): Approx. 600x402x415mm



Oxygen cylinder (Optional)



THAI MEDICALS TRADING CO.,LTD

Address : 67/17 Moo.1 Mahasawat, Phutthamonthon Nakhonpathom 73170 Thailand

Tel: +66 81-3451047 Web: www.tmt-med.com Web: www.thaimedicaltrading.co.th E-mail : infinity_bio@hotmail.com

Product Code Information	Description
Crius V6	Crius V6 ICU Ventilator Trolley Mechanical Arm ADU Reusable Finger Clip SpO2 Sensor SpO2 Analog (Extention Cable) Quick Connector Oxygen Gas Hose 3M & Connector With Machine Disposable Tank Patient Circuit with Filter & Baloon (Adult) Reusable Adult Mask Disposable Nebulizer Kit (Adult) Humidifier (Adult) Extra Limb (Corrugated) Power Cable User Manual Certificate of Approval Reusable Tube

